



Border Gateway Protocol

- Routing Protocol used to exchange routing information between networks
exterior gateway protocol
- RFC1771
work in progress to update
draft-ietf-idr-bgp4-10.txt
- Currently Version 4
- Runs over TCP

ISP/ISP Workshops © 2000, Cisco Systems, Inc. www.cisco.com

BGP

- Path Vector Protocol
- Incremental Updates
- Many options for policy enforcement
- Classless Inter Domain Routing (CIDR)
- Widely used for Internet backbone
- Autonomous systems

ISP/ISP Workshops © 2000, Cisco Systems, Inc. www.cisco.com

Path Vector Protocol


- BGP is classified as a *path vector* routing protocol (see RFC 1322)

A path vector protocol defines a route as a pairing between a destination and the attributes of the path to that destination.

12.6.126.0/24 207.126.96.43 1021 0 6461 7018 6337 11268 i

AS Path


ISP/ISP Workshops © 2000, Cisco Systems, Inc. www.cisco.com

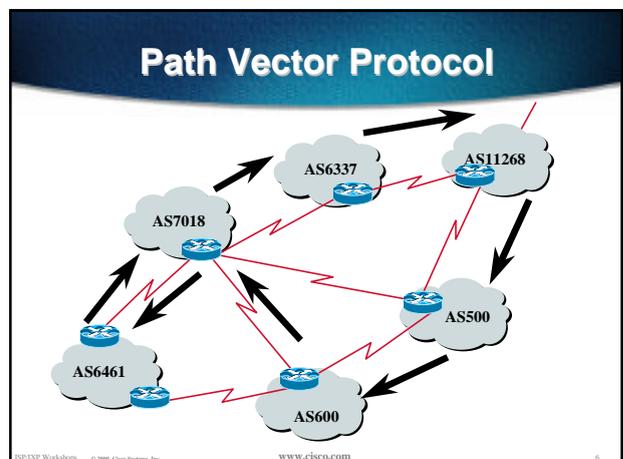


Definitions

- **Transit** - carrying traffic across a network, usually for a fee
- **Peering** - exchanging routing information and traffic
- **Default** - where to send traffic when there is no explicit match in the routing table

Peering and Transit example

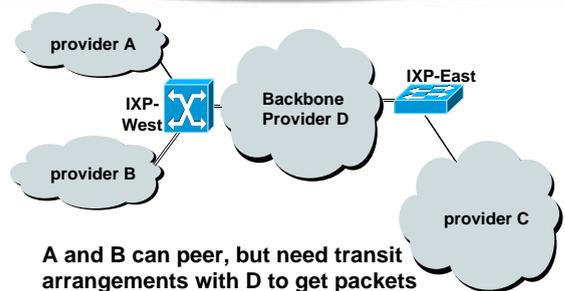


Autonomous System (AS)




- Collection of networks with same routing policy
- Single routing protocol
- Usually under single ownership, trust and administrative control

Demarcation Zone (DMZ)

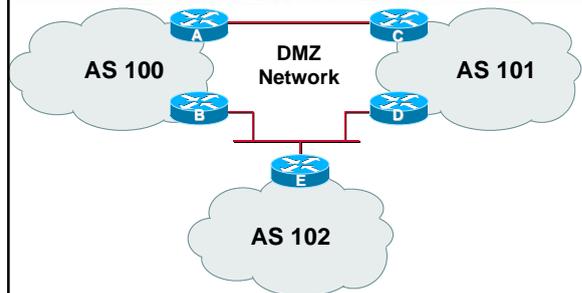

- Shared network between ASes

BGP Basics

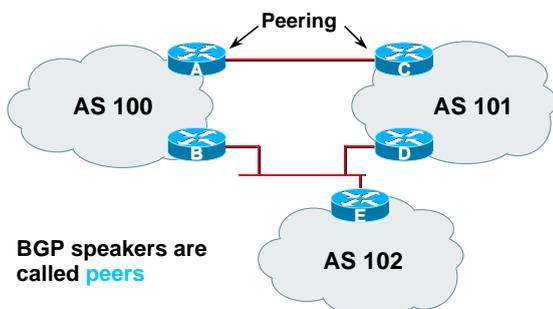

BGP speakers are called **peers**


BGP General Operation

- Learns multiple paths via internal and external BGP speakers
- Picks the best path and installs in the forwarding table
- Policies applied by influencing the best path selection


Constructing the Forwarding Table

- BGP “in” process
 - receives path information from peers
 - results of BGP path selection placed in the BGP table
 - “best path” flagged
- BGP “out” process
 - announces “best path” information to peers
- Best paths installed in forwarding table if:
 - prefix and prefix length are unique
 - lowest “protocol distance”

Constructing the Forwarding Table

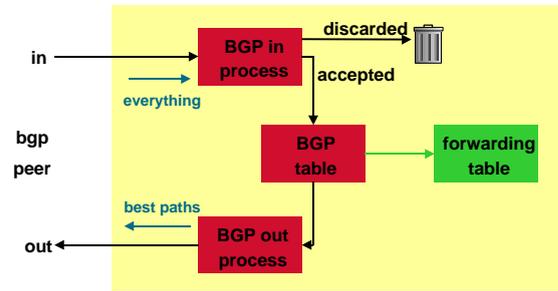

External BGP Peering (eBGP)

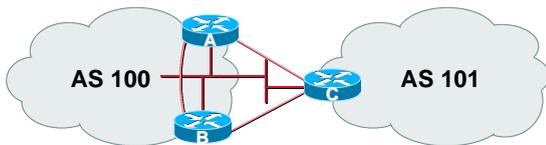

- Between BGP speakers in different AS
- Should be directly connected
- Do not run an IGP between eBGP peers

Configuring External BGP (Cisco IOS)

```

Router A in AS100
interface ethernet 5/0
ip address 222.222.10.2 255.255.255.240
router bgp 100
network 220.220.8.0 mask 255.255.252.0
neighbor 222.222.10.1 remote-as 101
neighbor 222.222.10.1 prefix-list RouterC in
neighbor 222.222.10.1 prefix-list RouterC out
    
```


```

Router C in AS101
interface ethernet 1/0/0
ip address 222.222.10.1 255.255.255.240
router bgp 101
network 220.220.16.0 mask 255.255.240.0
neighbor 222.222.10.2 remote-as 100
neighbor 222.222.10.2 prefix-list RouterA in
neighbor 222.222.10.2 prefix-list RouterA out
    
```

Internal BGP (iBGP)

- BGP peer within the same AS
- Not required to be directly connected
- iBGP speakers need to be fully meshed
 - they originate connected networks
 - they do not pass on prefixes learned from other iBGP speakers

Internal BGP Peering (iBGP)

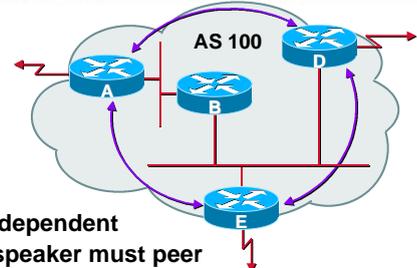


- Topology independent
- Each iBGP speaker must peer with every other iBGP speaker in the AS

Stable iBGP Peering

- Peer with loop-back address
- iBGP session is not dependent on state of a single interface
- iBGP session is not dependent on physical topology
- Loop-back interface does not go down - ever!

Peering to Loop-Back Address

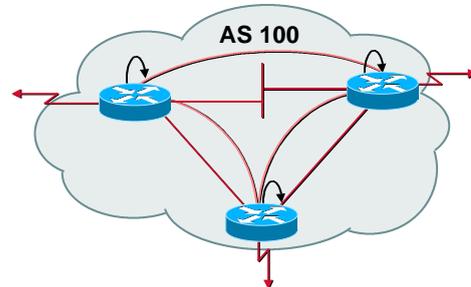

Configuring Internal BGP (Cisco IOS)

```
Router A
interface loopback 0
ip address 215.10.7.1 255.255.255.255
router bgp 100
network 220.220.1.0
neighbor 215.10.7.2 remote-as 100
neighbor 215.10.7.2 update-source loopback0
neighbor 215.10.7.3 remote-as 100
neighbor 215.10.7.3 update-source loopback0

Router B
interface loopback 0
ip address 215.10.7.2 255.255.255.255
router bgp 100
network 220.220.5.0
neighbor 215.10.7.1 remote-as 100
neighbor 215.10.7.1 update-source loopback0
neighbor 215.10.7.3 remote-as 100
neighbor 215.10.7.3 update-source loopback0
```

Inserting prefixes into BGP - network command

- Configuration Example

```
router bgp 109
network 198.10.4.0 mask 255.255.254.0
ip route 198.10.0.0 255.255.254.0 serial10
```
- A matching route must exist in the routing table before the network is announced
- Forces origin to be "IGP"

Configuration Aggregation - Network Command

- Configuration Example

```
router bgp 109
network 198.10.0.0 mask 255.255.0.0
ip route 198.10.0.0 255.255.0.0 null10 250
```
- A matching route must exist in the routing table before the network is announced
- Easiest and best way of generating an aggregate

Configuring Aggregation - aggregate-address command

- Configuration Example

```
router bgp 109
network 198.10.4.0 mask 255.255.252.0
aggregate-address 198.10.0.0 255.255.0.0 [ summary-only ]
```
- Requires more specific prefix in routing table before aggregate is announced
- {summary-only} keyword
optional keyword which ensures that only the summary is announced if a more specific prefix exists in the routing table

Auto Summarisation

- Cisco IOS automatically summarises subprefixes to the classful network.

Example:

61.10.8.0/22 --> 61.0.0.0/8

- **Must** be turned off for any Internet connected site using BGP.

```
router bgp 109
no auto-summary
```

Synchronisation

- In Cisco IOS, BGP does not advertise a route before all routers in the AS have learned it via an IGP

- **Disable synchronisation if:**

AS doesn't pass traffic from one AS to another, or
All transit routers in AS run BGP, or
iBGP is used across backbone

```
router bgp 109
no synchronization
```

Summary

- BGP4 - distance vector protocol
- iBGP versus eBGP
- stable iBGP - peer with loopbacks
- announcing prefixes & aggregates
- **no synchronization & no auto-summary**

BGP Attributes


What Is an Attribute?




| | | | | | |
|-----|----------|---------|-----|-----|-----|
| ... | Next Hop | AS Path | MED | ... | ... |
|-----|----------|---------|-----|-----|-----|

- Describes the characteristics of prefix
- Transitive or non-transitive
- Some are mandatory

AS-Path

- Sequence of ASes a route has traversed
- Loop detection
- Apply policy

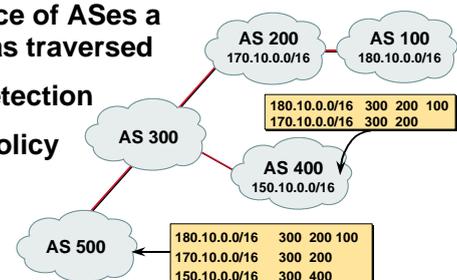

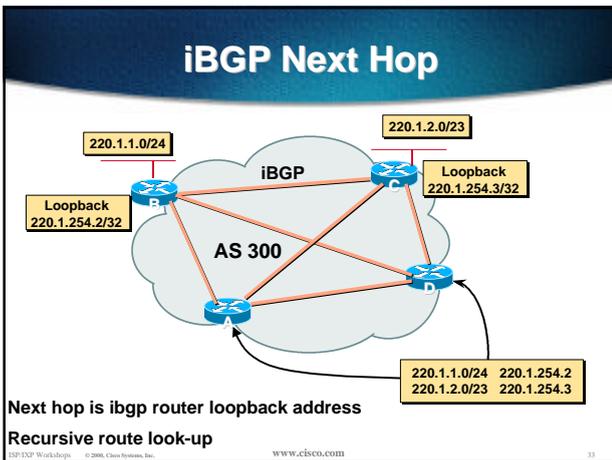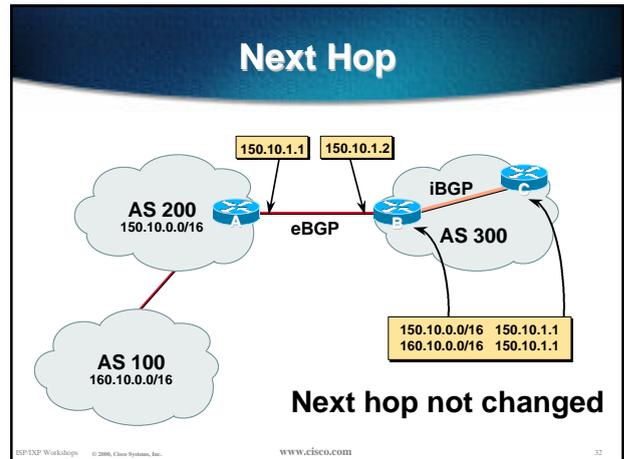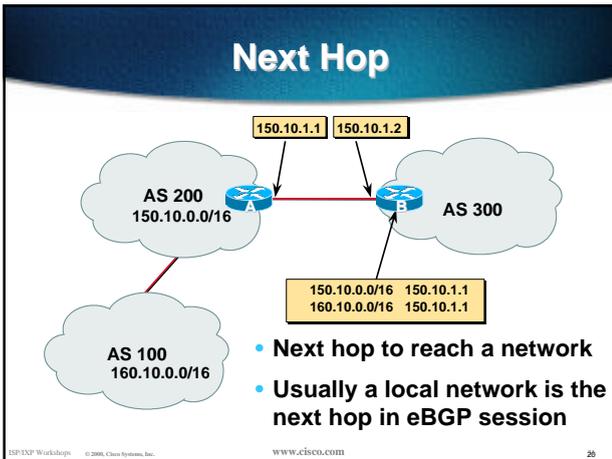

- ### Next Hop (summary)
- IGP should carry route to next hops
 - Recursive route look-up
 - Unlinks BGP from actual physical topology
 - Allows IGP to make intelligent forwarding decision
- ISP/EX Workshops © 2008, Cisco Systems, Inc. www.cisco.com 34

- ### Origin
- Conveys the origin of the prefix
 - Influence best path selection
 - Three values - IGP, EGP, incomplete
 - IGP - generated from BGP network statement
 - EGP - generated from EGP
 - incomplete - generated by "redistribute" action
- ISP/EX Workshops © 2008, Cisco Systems, Inc. www.cisco.com 35


- ### Aggregator
- Useful for debugging purposes
 - Conveys the IP address of the router/BGP speaker generating the aggregate route
 - Doesn't influence path selection
- ISP/EX Workshops © 2008, Cisco Systems, Inc. www.cisco.com 36

Local Preference

- **Local to an AS - non-transitive**
local preference set to 100 when heard from neighbouring AS
- **Used to influence BGP path selection**
determines best path for outbound traffic
- **Path with highest local preference wins**

ISP/DP Workshops © 2008, Cisco Systems, Inc. www.cisco.com 37

Local Preference

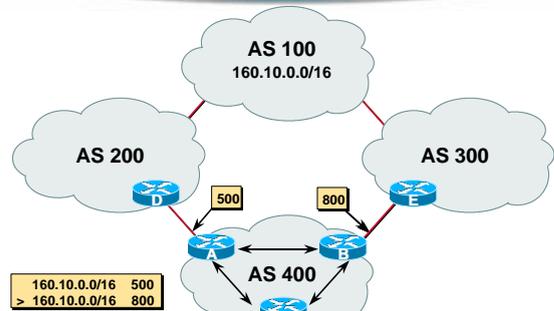

ISP/DP Workshops © 2008, Cisco Systems, Inc. www.cisco.com 38

Local Preference

- **Configuration of Router B:**
- ```

router bgp 400
 neighbor 220.5.1.1 remote-as 300
 neighbor 220.5.1.1 route-map local-pref in
 !
 route-map local-pref permit 10
 match ip address prefix-list MATCH
 set local-preference 800
 !
 ip prefix-list MATCH permit 160.10.0.0/16
 ip prefix-list MATCH deny 0.0.0.0/0 le 32

```


ISP/DP Workshops © 2008, Cisco Systems, Inc. www.cisco.com 39

## Multi-Exit Discriminator

- **Inter-AS - non-transitive**  
metric reset to 0 on announcement to next AS
- **Used to convey the relative preference of entry points**  
determines best path for inbound traffic
- **Comparable if paths are from same AS**
- **IGP metric can be conveyed as MED**

ISP/DP Workshops © 2008, Cisco Systems, Inc. www.cisco.com 40

## Multi-Exit Discriminator (MED)

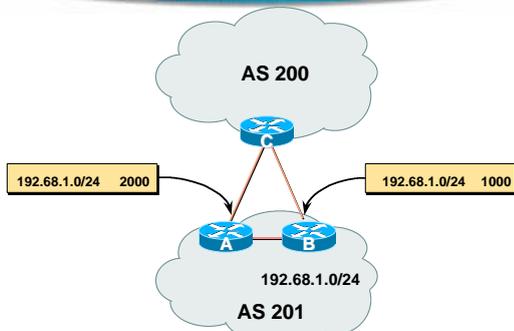

ISP/DP Workshops © 2008, Cisco Systems, Inc. www.cisco.com 41

## Multi-Exit Discriminator

- **Configuration of Router B:**
- ```


router bgp 400
 neighbor 220.5.1.1 remote-as 200
 neighbor 220.5.1.1 route-map set-med out
 !
 route-map set-med permit 10
 match ip address prefix-list MATCH
 set metric 1000
 !
 ip prefix-list MATCH permit 192.68.1.0/24
 ip prefix-list MATCH deny 0.0.0.0/0 le 32
    
```

ISP/DP Workshops © 2008, Cisco Systems, Inc. www.cisco.com 42

Community

- BGP attribute
- Used to group destinations
- Represented as two 16bit integers
- Each destination could be member of multiple communities
- Community attribute carried across AS's
- Useful in applying policies


Community

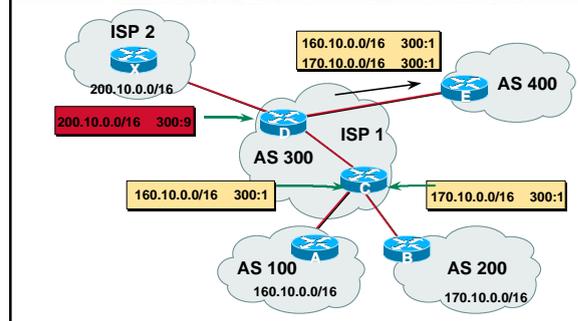

Well-Known Communities

- internet = all routes are members of this community
- no-export = do not advertise to eBGP peers
- no-advertise = do not advertise to any peer
- local-AS = do not advertise outside local AS (used with confederations)

No-Export Community

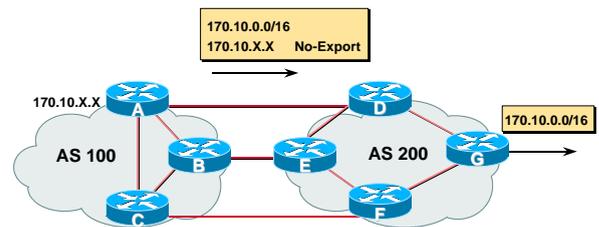

BGP Path Selection Algorithm

Why is this the best path?

BGP Path Selection Algorithm

- Do not consider iBGP path if not synchronised
- Do not consider path if no route to next hop
- Highest weight (local to router)
- Highest local preference (global within AS)
- Shortest AS path

BGP Path Selection Algorithm (continued)

- **Lowest origin code**
IGP < EGP < incomplete
- **Multi-Exit Discriminator**
Considered only if paths are from same AS
- **Prefer eBGP path over iBGP path**
- **Path with shortest next-hop metric wins**
- **Lowest router-id**



Applying Policy with BGP

- Policy-based on AS path, community or the prefix
- Rejecting/accepting selected routes
- Set attributes to influence path selection
- **Tools:**
 - Prefix-list (filters prefixes)
 - Filter-list (filters AS paths)
 - Route-maps and communities

Policy Control - Prefix List

- Per neighbour prefix filter
incremental configuration
- High performance access-list
- Inbound or Outbound
- Based upon network numbers
(using familiar IPv4 address/mask format)

Prefix Lists - Examples

- **Deny default route**
`ip prefix-list EG deny 0.0.0.0/0`
- **Permit the prefix 35.0.0.0/8**
`ip prefix-list EG permit 35.0.0.0/8`
- **Deny the prefix 172.16.0.0/12**
`ip prefix-list EG deny 172.16.0.0/12`
- **In 192/8 allow up to /24**
`ip prefix-list EG permit 192.0.0.0/8 le 24`
This allows all prefix sizes in the 192.0.0.0/8 address block, apart from /25, /26, /27, /28, /29, /30, /31 and /32.

Prefix Lists - Examples

- **In 192/8 deny /25 and above**
`ip prefix-list EG deny 192.0.0.0/8 ge 25`
This denies all prefix sizes /25, /26, /27, /28, /29, /30, /31 and /32 in the address block 192.0.0.0/8.
It has the same effect as the previous example
- **In 192/8 permit prefixes between /12 and /20**
`ip prefix-list EG permit 193.0.0.0/8 ge 12 le 20`
This denies all prefix sizes /8, /9, /10, /11, /21, /22, ... and higher in the address block 193.0.0.0/8.
- **Permit all prefixes**
`ip prefix-list EG permit 0.0.0.0/0 le 32`

Policy Control - Prefix List

- Example Configuration

```
router bgp 200
 network 215.7.0.0
 neighbor 220.200.1.1 remote-as 210
 neighbor 220.200.1.1 prefix-list PEER-IN in
 neighbor 220.200.1.1 prefix-list PEER-OUT out
!
ip prefix-list PEER-IN deny 218.10.0.0/16
ip prefix-list PEER-IN permit 0.0.0.0/0 le 32
ip prefix-list PEER-OUT permit 215.7.0.0/16
ip prefix-list PEER-OUT deny 0.0.0.0/0 le 32
```

Policy Control - Filter List

- Filter routes based on AS path
- Inbound or Outbound
- Example Configuration:

```
router bgp 100
 network 215.7.0.0
 neighbor 220.200.1.1 filter-list 5 out
 neighbor 220.200.1.1 filter-list 6 in
!
ip as-path access-list 5 permit ^200$
ip as-path access-list 6 permit ^150$
```

Policy Control - Regular Expressions

- Like Unix regular expressions

- . Match one character
- * Match any number of preceding expression
- + Match at least one of preceding expression
- ^ Beginning of line
- \$ End of line
- _ Beginning, end, white-space, brace
- | Or
- () brackets to contain expression

Policy Control - Regular Expressions

- Simple Examples

- * Match anything
- .+ Match at least one character
- ^\$ Match routes local to this AS
- _1800\$ Originated by 1800
- ^1800_ Received from 1800
- _1800_ Via 1800
- _790_1800_ Passing through 1800 then 790
- _(1800)_+ Match at least one of 1800 in sequence
- _\\(65350)_ Via 65350 (confederation AS)

Policy Control - Regular Expressions

- Not so simple Examples

- ^[0-9]+\$ Match AS_PATH length of one
- ^[0-9]+_[0-9]+\$ Match AS_PATH length of two
- ^[0-9]*_[0-9]+\$ Match AS_PATH length of one or two
- ^[0-9]*_[0-9]*\$ Match AS_PATH length of one or two
- ^[0-9]+_[0-9]+_[0-9]+\$ Match AS_PATH length of three
- _(701|1800)_ Match anything which has gone through AS701 or AS1800
- _1849(._+_)12163\$ Match anything of origin AS12163 and passed through AS1849

Policy Control - Route Maps

- Example Configuration - route map and prefix-lists

```
ip prefix-list HIGH-PREF permit 10.0.0.0/8
ip prefix-list HIGH-PREF deny 0.0.0.0/0 le 32
ip prefix-list LOW-PREF permit 20.0.0.0/8
ip prefix-list LOW-PREF deny 0.0.0.0/0 le 32
!
route-map infilter permit 10
 match ip address prefix-list HIGH-PREF
 set local-preference 120
!
route-map infilter permit 20
 match ip address prefix-list LOW-PREF
 set local-preference 80
!
router bgp 100
 neighbor 1.1.1.1 route-map infilter in
```

Policy Control - Route Maps

- Example Configuration - route map and filter lists

```
router bgp 100
 neighbor 220.200.1.2 remote-as 200
 neighbor 220.200.1.2 route-map filter-on-as-path in
 !
 route-map filter-on-as-path permit 10
  match as-path 1
  set local-preference 80
 !
 route-map filter-on-as-path permit 20
  match as-path 2
  set local-preference 200
 !
 ip as-path access-list 1 permit _150$
 ip as-path access-list 2 permit _210_
```

Policy Control - Route Maps

- Example configuration of AS-PATH prepend

```
router bgp 300
 network 215.7.0.0
 neighbor 2.2.2.2 remote-as 100
 neighbor 2.2.2.2 route-map SETPATH out
 !
 route-map SETPATH permit 10
  set as-path prepend 300 300
```

- Standard practice implements two occurrences of the ASN when prepending

Policy Control - Matching Communities

- Example Configuration

```
router bgp 100
 neighbor 220.200.1.2 remote-as 200
 neighbor 220.200.1.2 route-map filter-on-community in
 !
 route-map filter-on-community permit 10
  match community 1
  set local-preference 50
 !
 route-map filter-on-community permit 20
  match community 2 exact-match
  set local-preference 200
 !
 ip community-list 1 permit 150:3 200:5
 ip community-list 2 permit 88:6
```

Policy Control - Setting Communities

- Example Configuration

```
router bgp 100
 network 215.7.0.0
 neighbor 220.200.1.1 remote-as 200
 neighbor 220.200.1.1 send-community
 neighbor 220.200.1.1 route-map set-community out
 !
 route-map set-community permit 10
  match ip address prefix-list NO-ANNOUNCE
  set community no-export
 !
 route-map set-community permit 20
  match ip address prefix-list EVERYTHING
 !
 ip prefix-list NO-ANNOUNCE permit 172.168.0.0/16 ge 17
 ip prefix-list EVERYTHING permit 0.0.0.0/0 le 32
```

BGP Summary

- Attributes
- Path Selection Process
- Policy Control Tools

- Any questions?