

# **BGP Attributes and Policy Control**

**ISP/IXP Workshops**

# Agenda

Cisco.com

- **BGP Attributes**
- **BGP Path Selection**
- **Applying Policy**

# **BGP Attributes**

**The “tools” available for the job**


# What Is an Attribute?




- **Describes the characteristics of prefix**
- **Transitive or non-transitive**
- **Some are mandatory**

# AS-Path


- Sequence of ASes a route has traversed
- Loop detection
- Apply policy

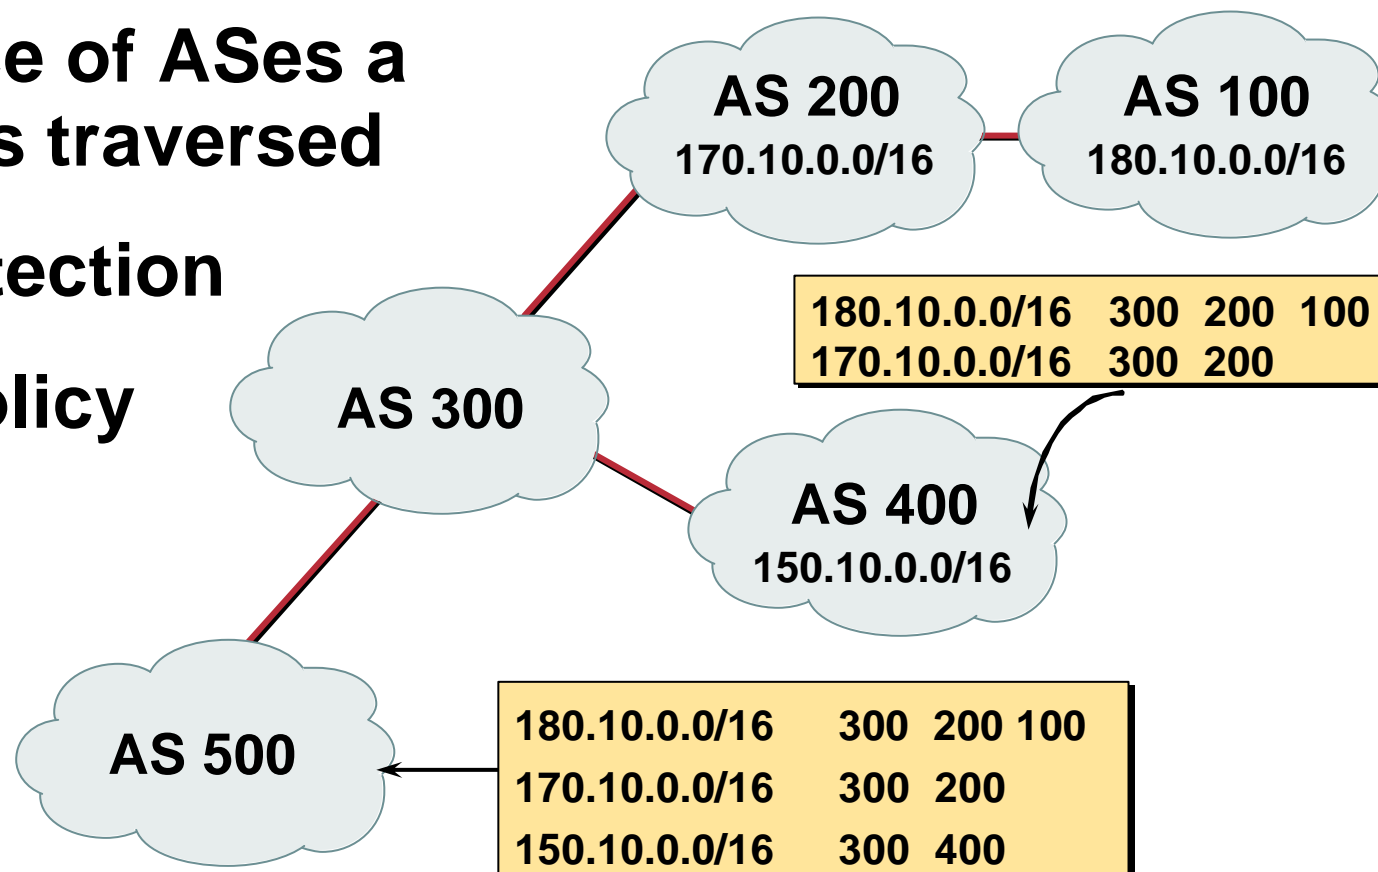


# AS-Path loop detection

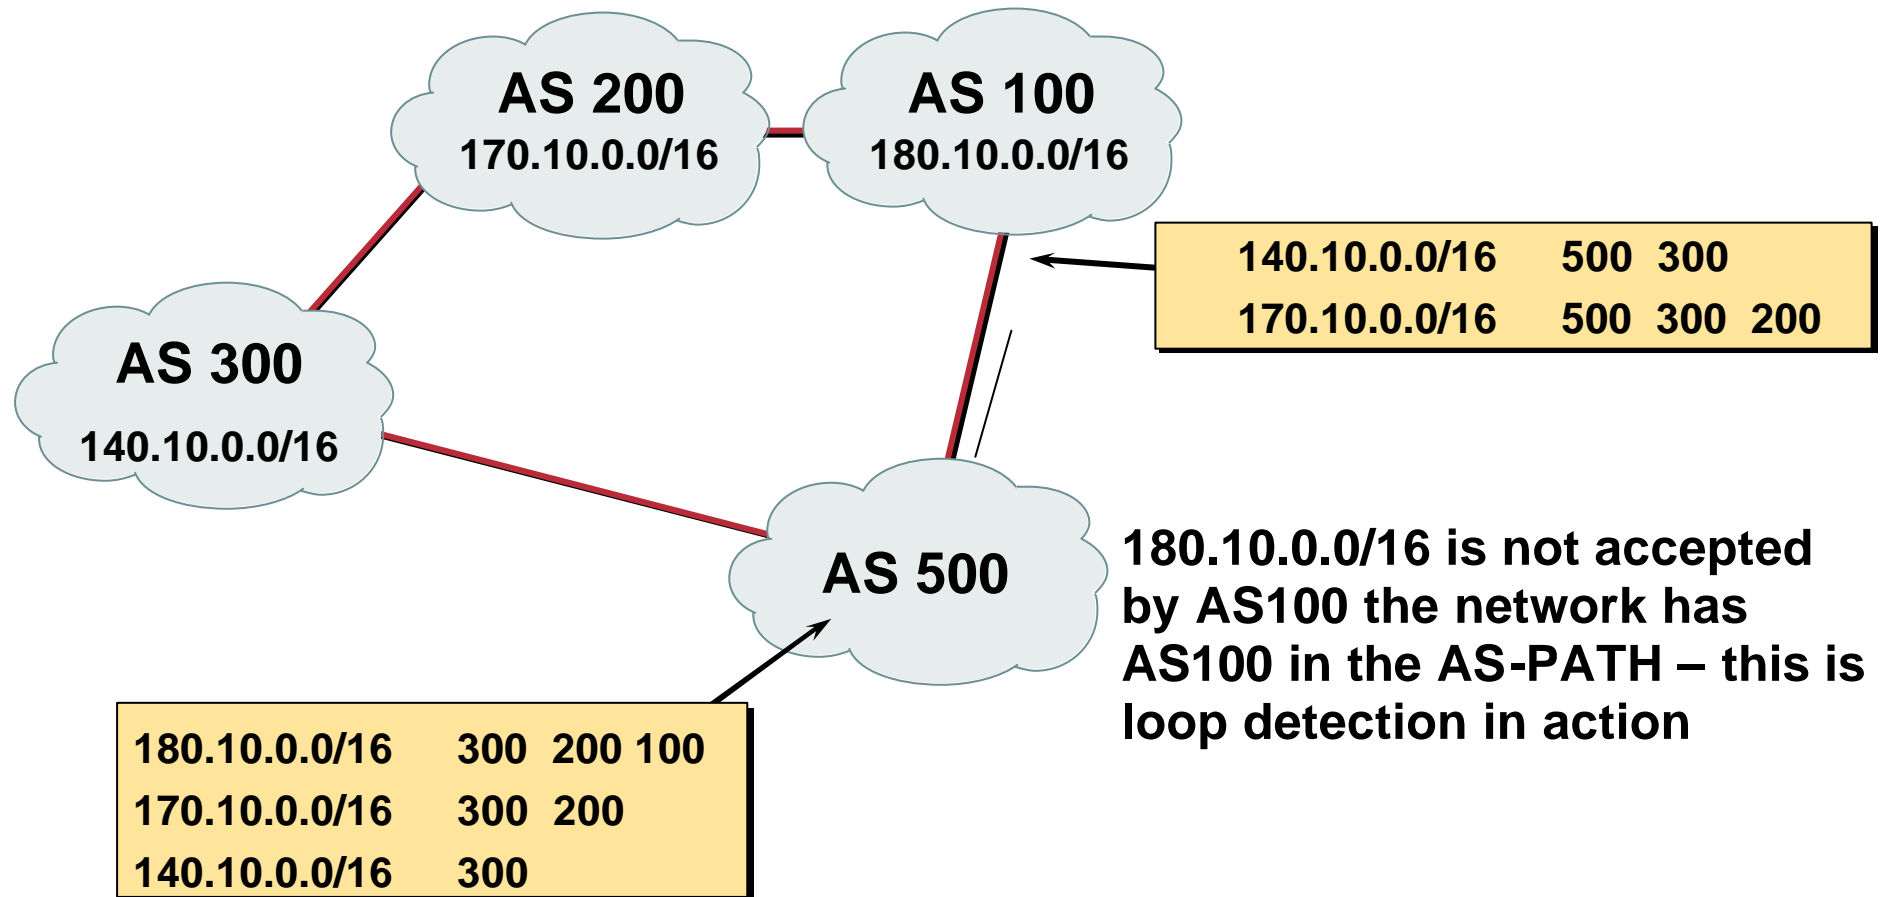

# Next Hop

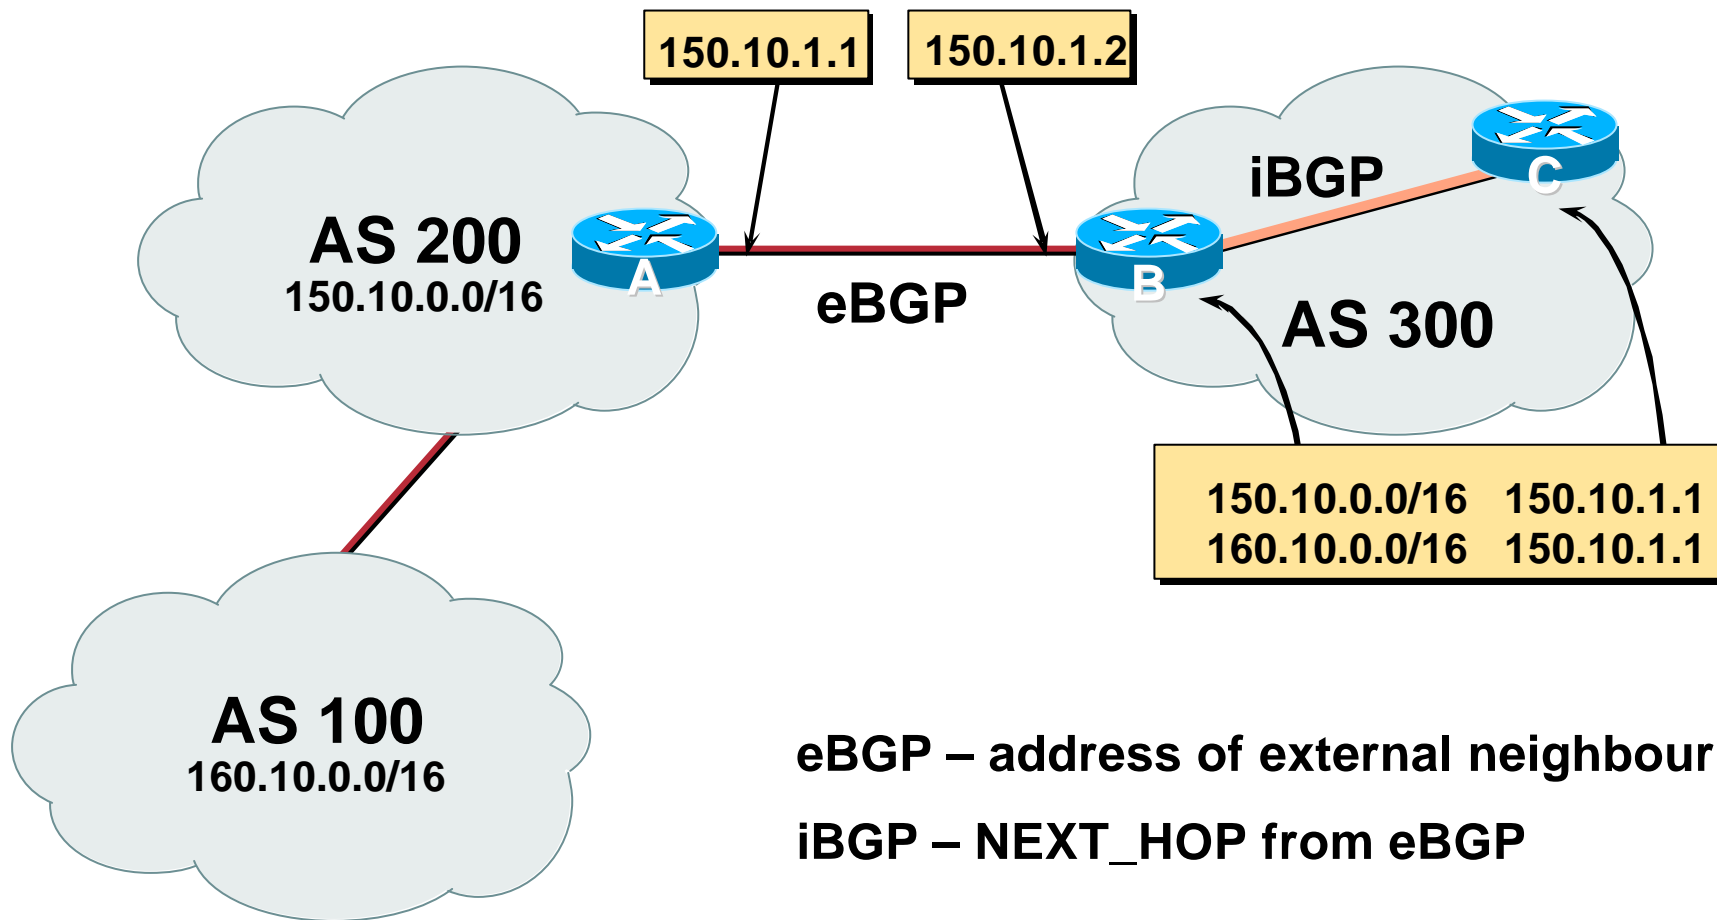

# iBGP Next Hop

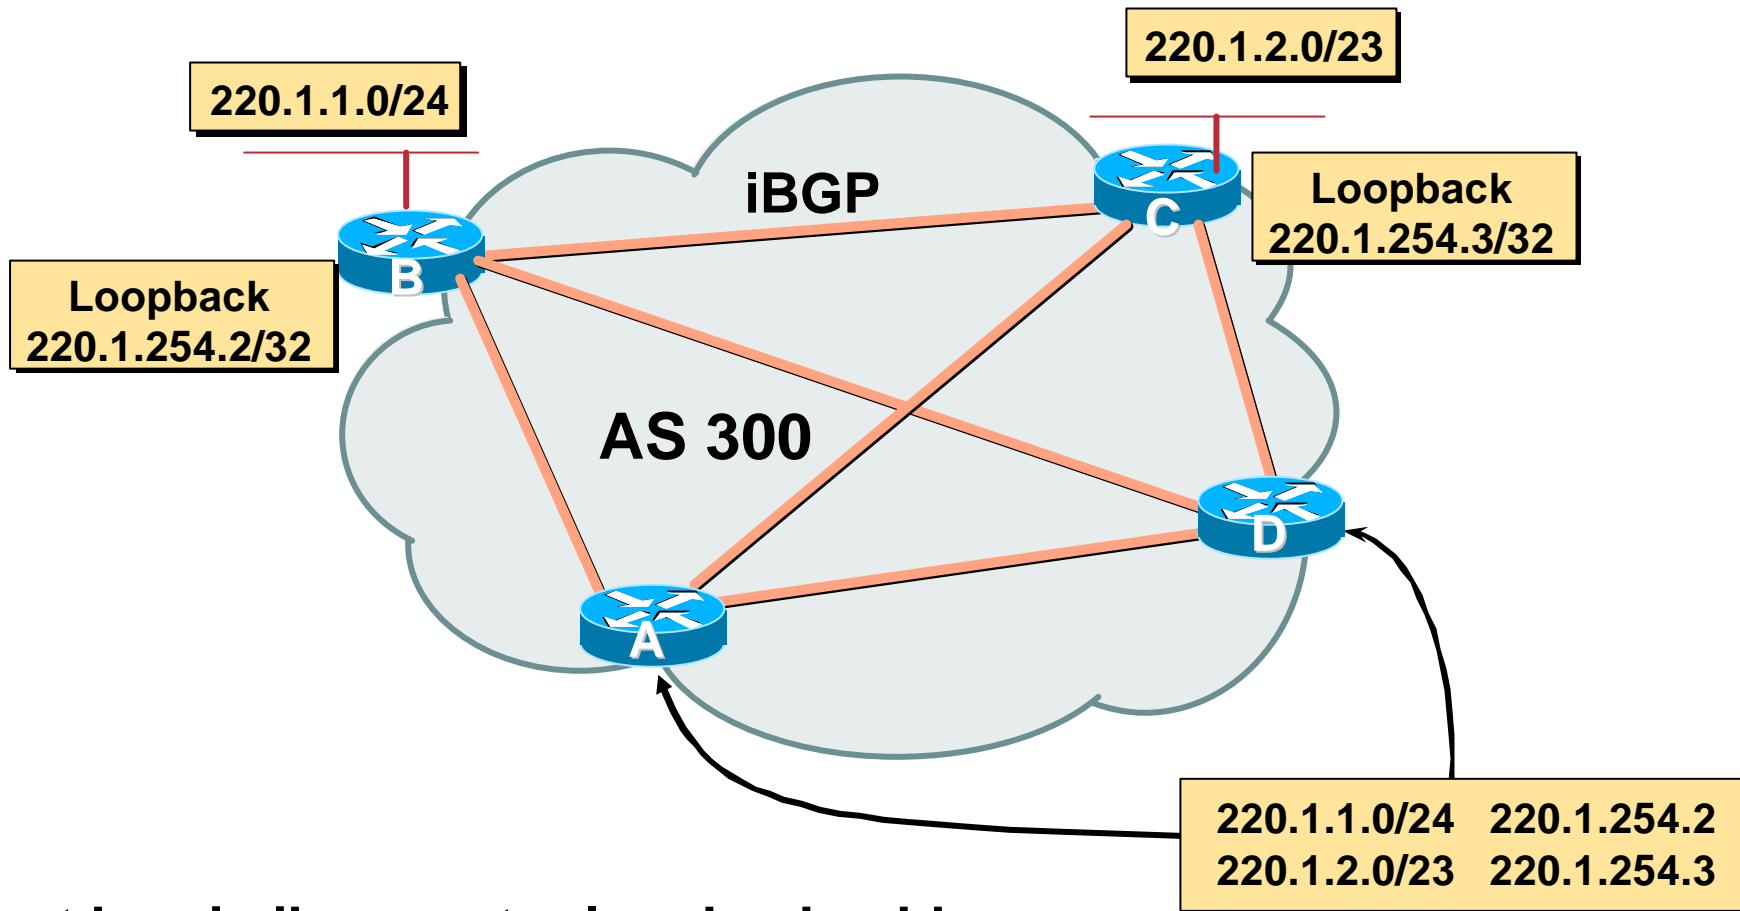


Next hop is ibgp router loopback address

Recursive route look-up



# Third Party Next Hop

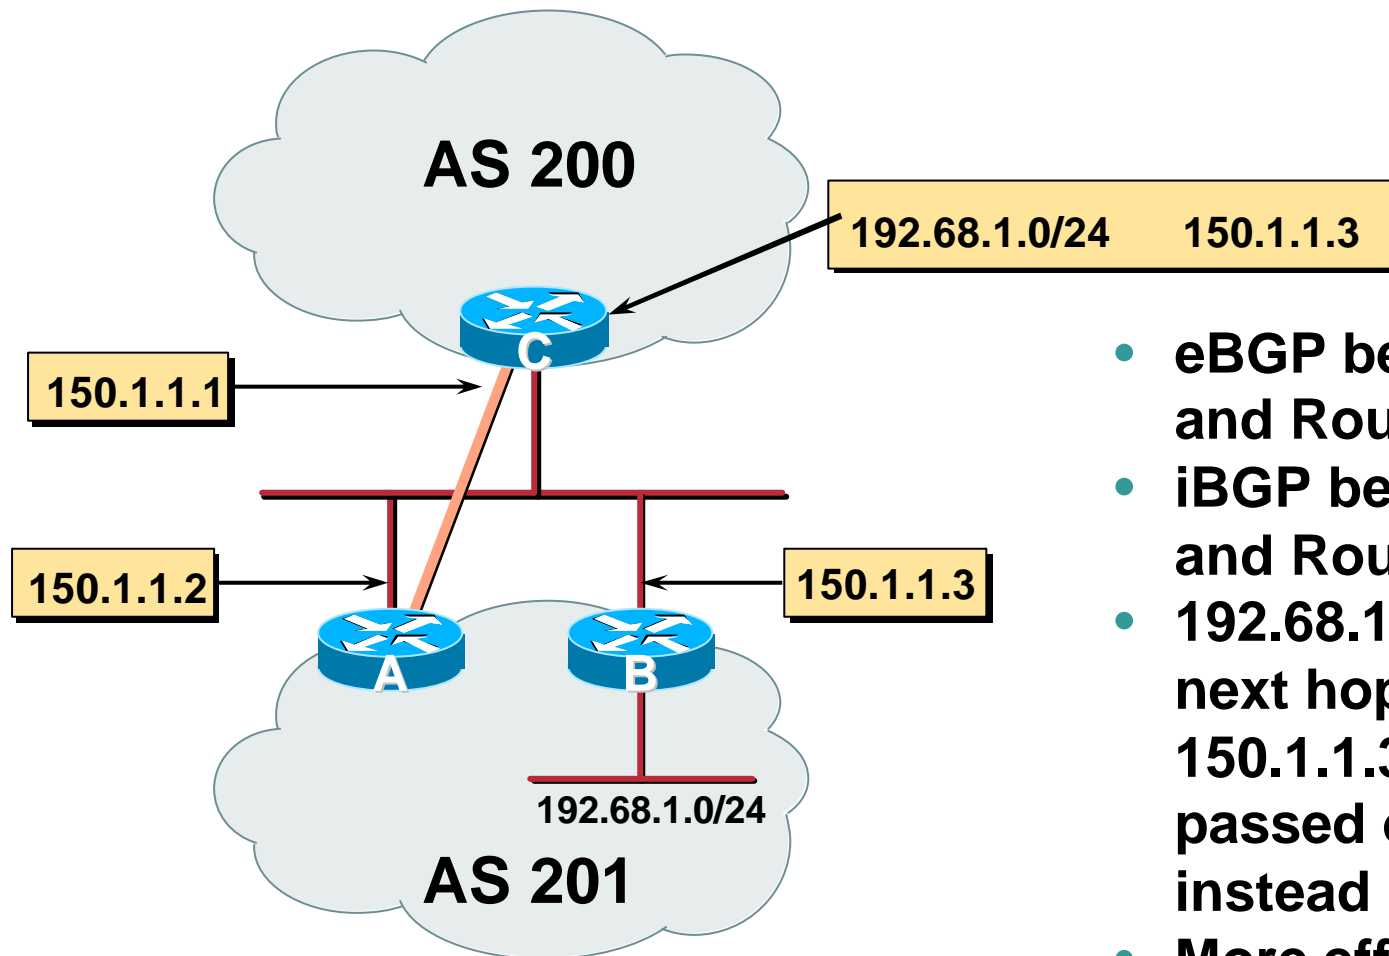

- eBGP between Router A and Router C
- iBGP between Router A and Router B
- 192.68.1/24 prefix has next hop address of 150.1.1.3 – this is passed on to Router C instead of 150.1.1.2
- More efficient
- No extra config needed

# Next Hop (summary)

- **IGP should carry route to next hops**
- **Recursive route look-up**
- **Unlinks BGP from actual physical topology**
- **Allows IGP to make intelligent forwarding decision**


# Origin

- **Conveys the origin of the prefix**
- **“Historical” attribute**
- **Influences best path selection**
- **Three values: IGP, EGP, incomplete**
  - IGP – generated by BGP network statement**
  - EGP – generated by EGP**
  - incomplete – redistributed from another routing protocol**

# Aggregator

- **Useful for debugging purposes**
- **Conveys the IP address of the router/BGP speaker generating the aggregate route**
- **Does not influence path selection**

# Local Preference

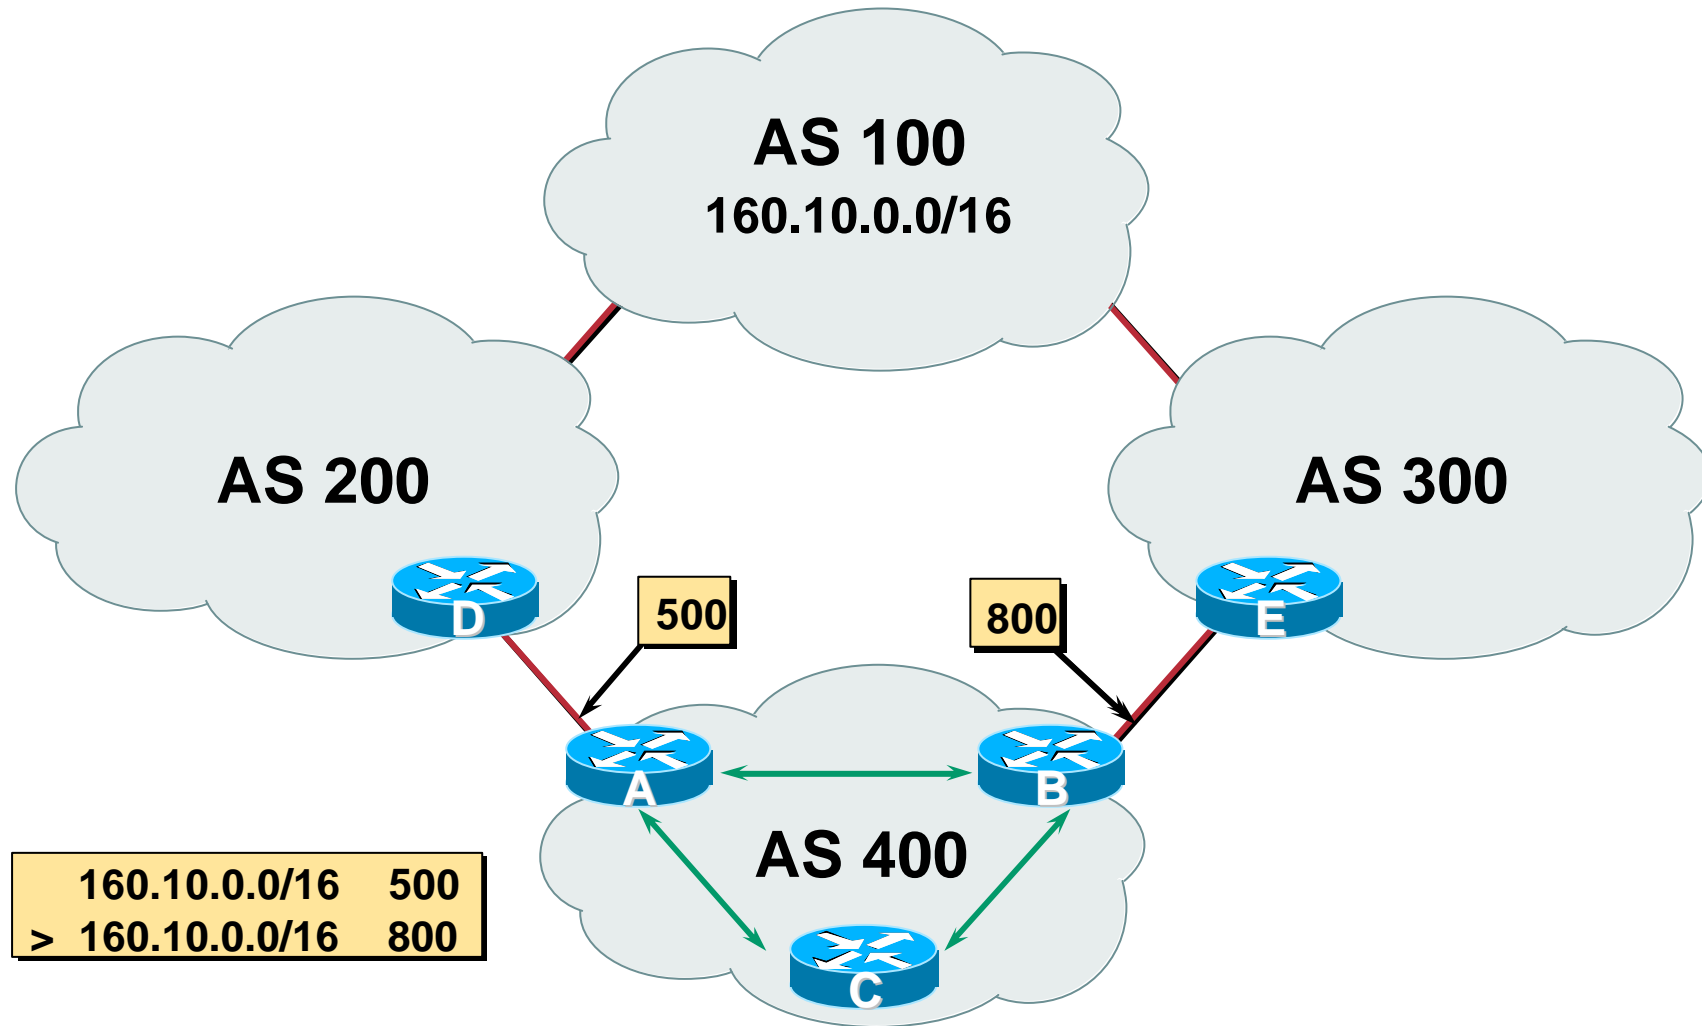

# Local Preference

- **Local to an AS – non-transitive**  
local preference set to 100 when heard from neighbouring AS
- **Used to influence BGP path selection**  
determines best path for *outbound* traffic
- **Path with highest local preference wins**


# Local Preference

- **Configuration of Router B:**

```
router bgp 400
  neighbor 220.5.1.1 remote-as 300
  neighbor 220.5.1.1 route-map local-pref in
!
route-map local-pref permit 10
  match ip address prefix-list MATCH
  set local-preference 800
!
ip prefix-list MATCH permit 160.10.0.0/16
```

# Multi-Exit Discriminator (MED)

Cisco.com

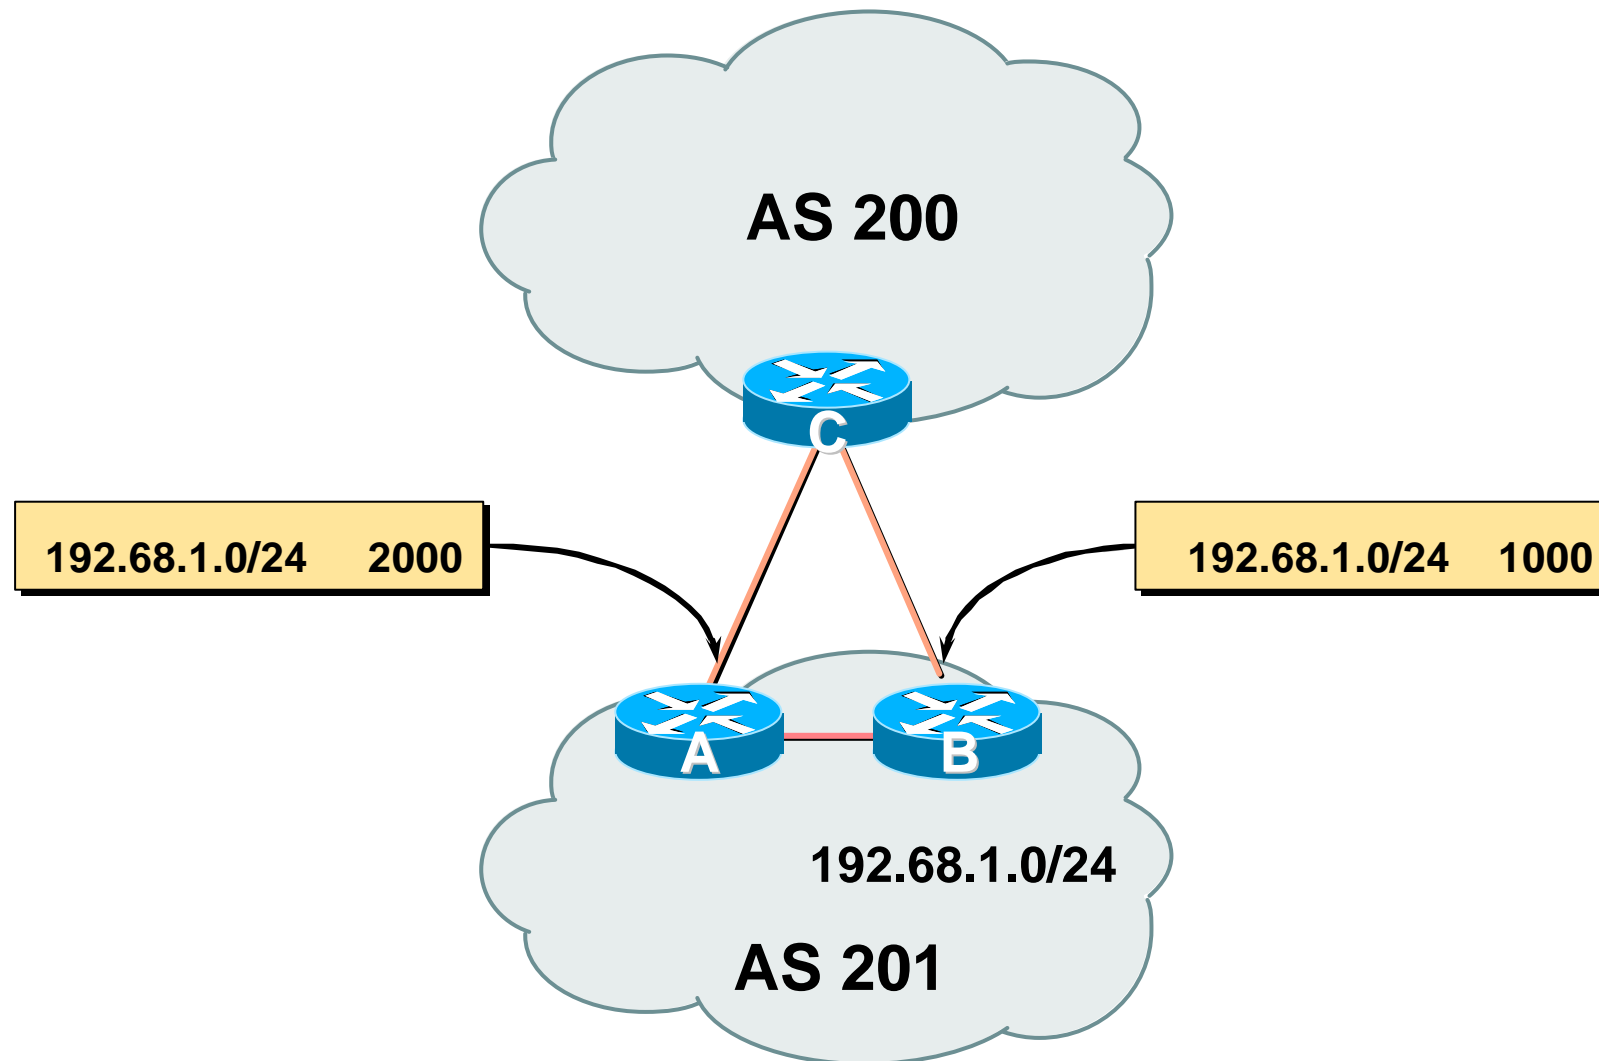



# Multi-Exit Discriminator

- **Inter-AS – non-transitive**
  - metric attribute not announced to next AS
- **Used to convey the relative preference of entry points**
  - determines best path for *inbound* traffic
- **Comparable if paths are from same AS**
- **IGP metric can be conveyed as MED**
  - set metric-type internal** in route-map

# MED & IGP Metric

- **set metric-type internal**

**enable BGP to advertise a MED which corresponds to the IGP metric values**

**changes are monitored (and re-advertised if needed) every 600s**

**bgp dynamic-med-interval <secs>**

# Multi-Exit Discriminator

- **Configuration of Router B:**

```
router bgp 400
  neighbor 220.5.1.1 remote-as 200
  neighbor 220.5.1.1 route-map set-med out
!
route-map set-med permit 10
  match ip address prefix-list MATCH
  set metric 1000
!
ip prefix-list MATCH permit 192.68.1.0/24
```

# Weight


- **Not really an attribute – local to router**
- **Highest weight wins**
- **Applied to all routes from a neighbour**
- **Weight assigned to routes based on filter**

```
neighbor 220.5.7.1 weight 100
```

```
neighbor 220.5.7.3 filter-list 3 weight 50
```

# Weight – Used to help Deploy RPF

Cisco.com

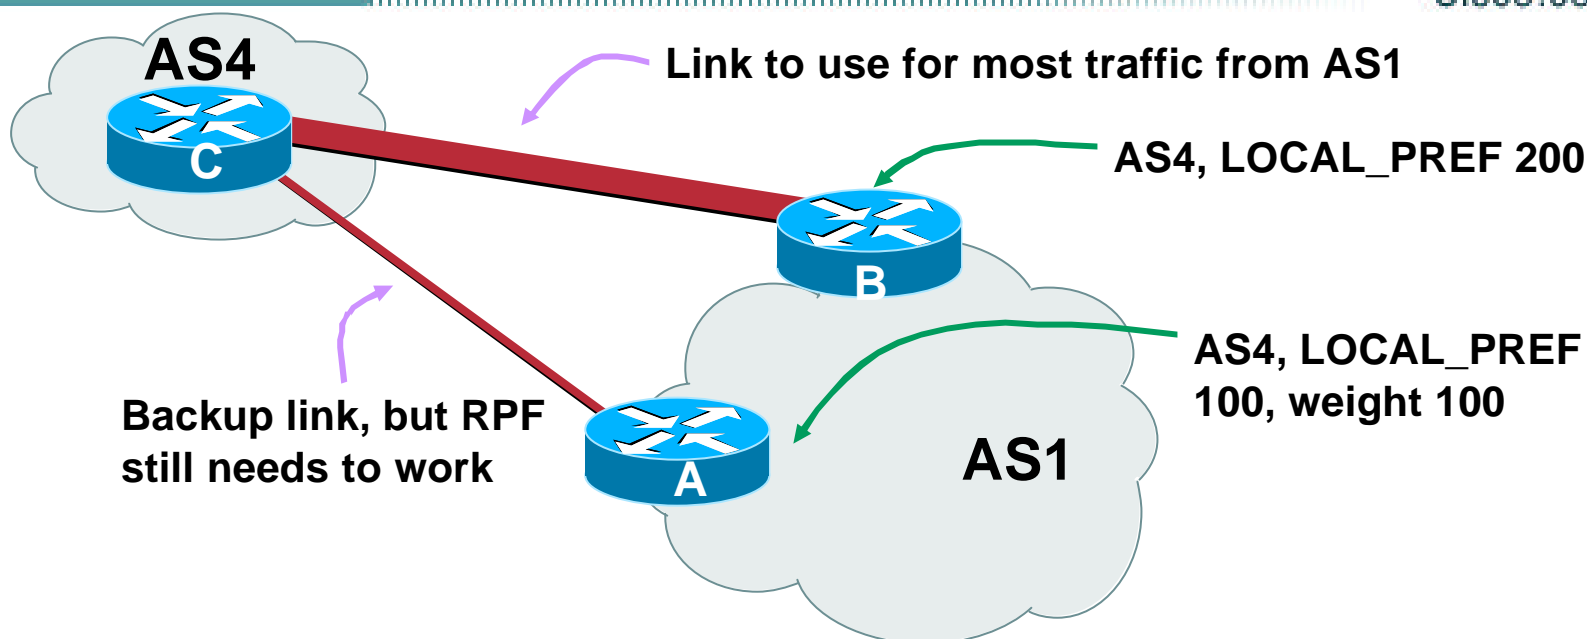


- Best path to AS4 from AS1 is always via B due to local-pref
- But packets arriving at A from AS4 over the direct C to A link will pass the RPF check as that path has a priority due to the weight being set

If weight was not set, best path back to AS4 would be via B, and the RPF check would fail

# Community

- **Communities described in RFC1997**
- **32 bit integer**
  - Commonly represented as two 16 bit integers (RFC1998)
- **Used to group destinations**
  - Each destination could be member of multiple communities
- **Community attribute carried across AS's**
- **Very useful in applying policies**

# Community

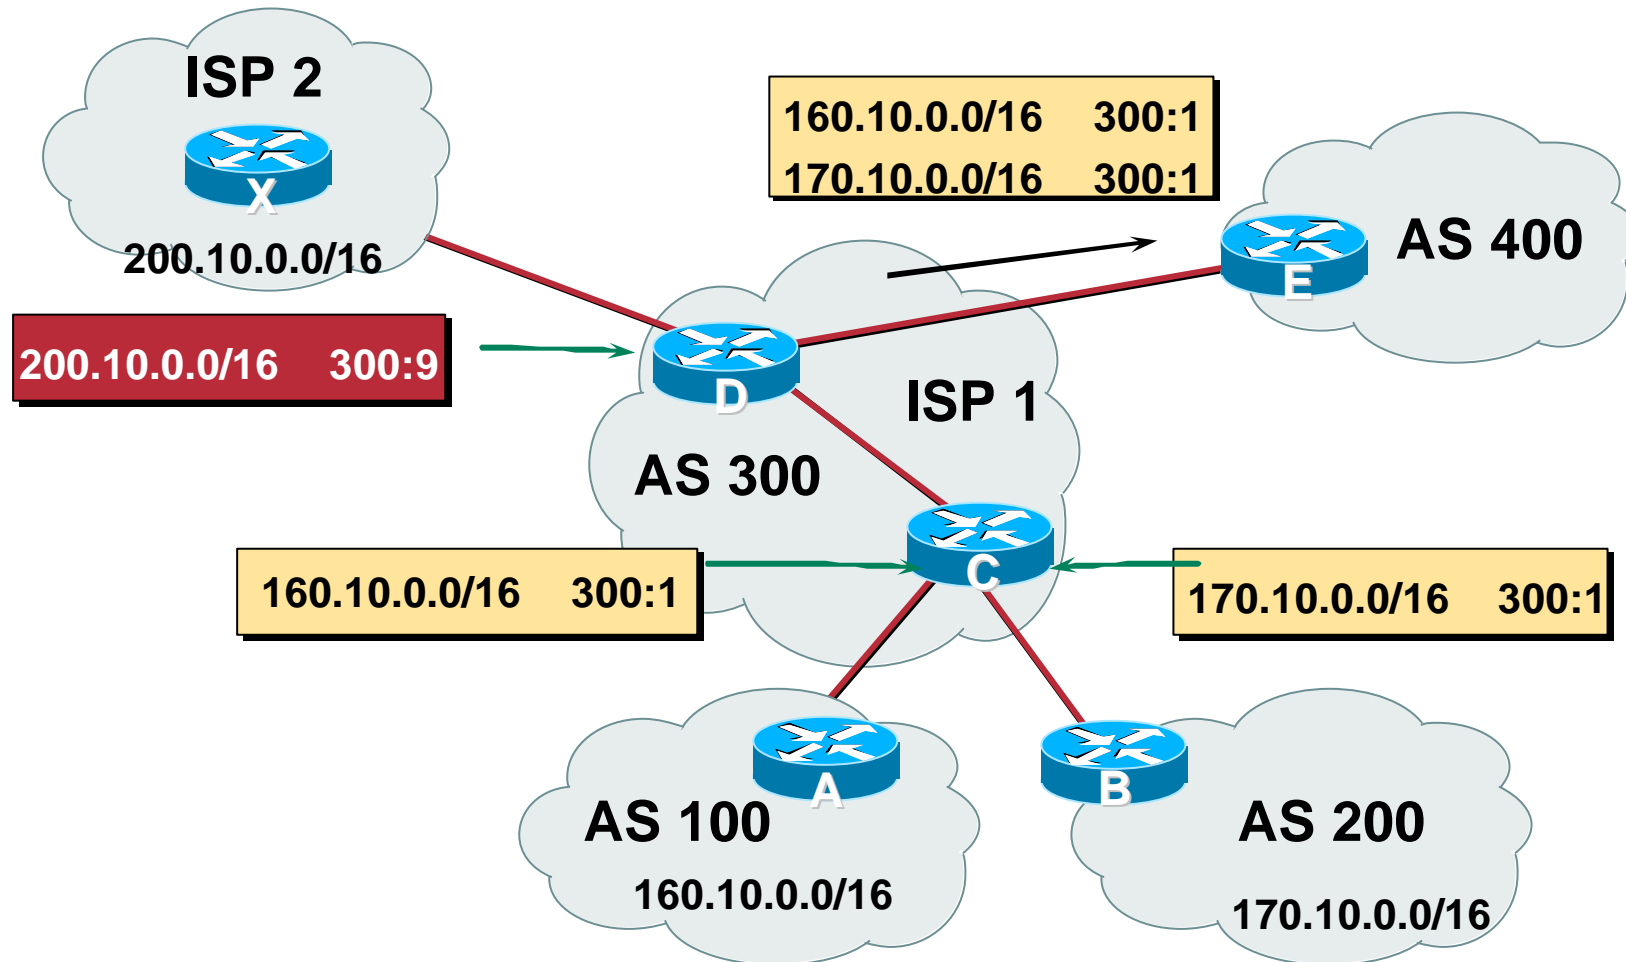


# Well-Known Communities

- **no-export**
  - do not advertise to eBGP peers
- **no-advertise**
  - do not advertise to any peer
- **local-AS**
  - do not advertise outside local AS (only used with confederations)



# No-Export Community

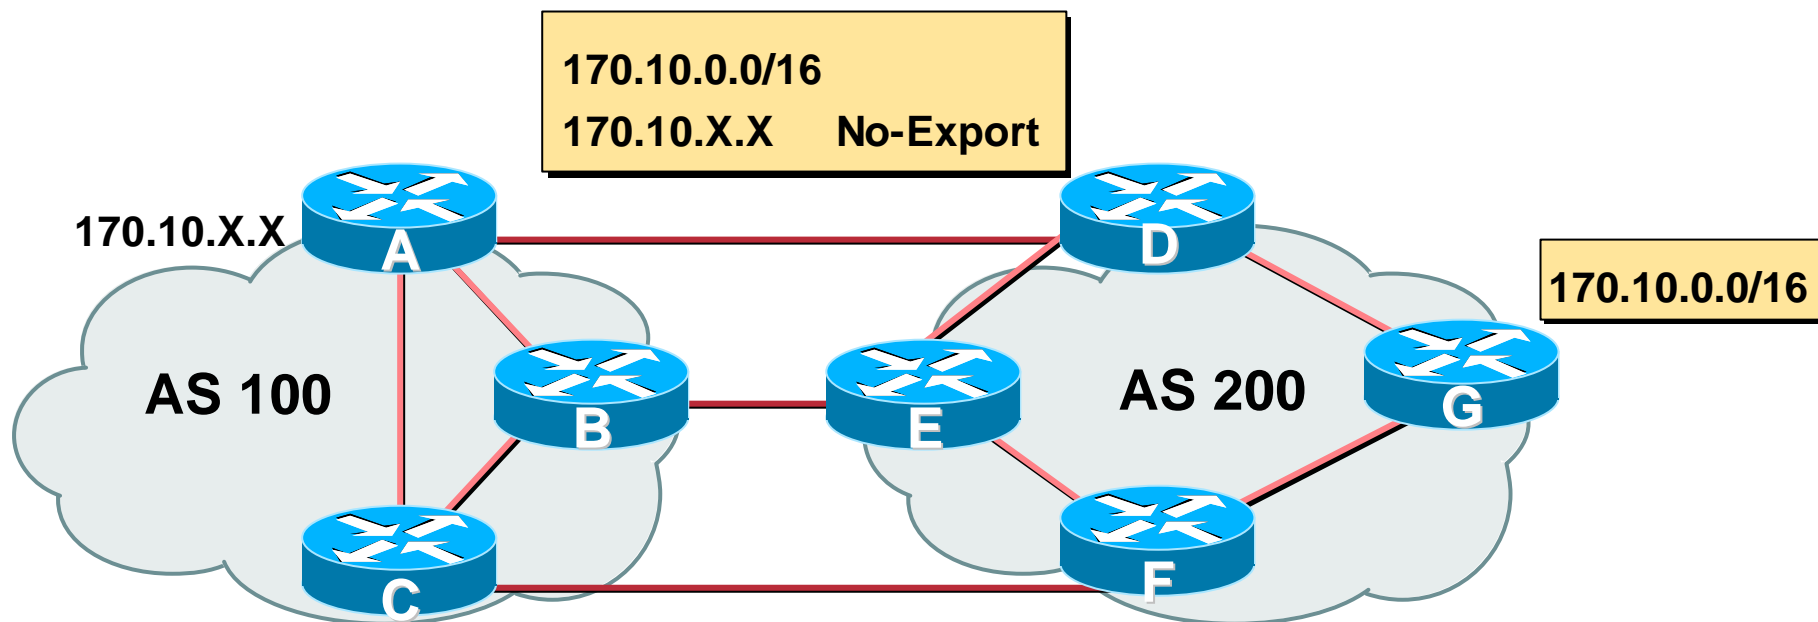

- AS100 announces aggregate and subprefixes  
aim is to improve loadsharing by leaking subprefixes
- Subprefixes marked with **no-export** community
- Router G in AS200 does not announce prefixes with **no-export** community set

# BGP Path Selection Algorithm

**Why is this the best path?**

# BGP Path Selection Algorithm

- **Do not consider path if no route to next hop**
- **Do not consider iBGP path if not synchronised**
- **Highest weight (local to router)**
- **Highest local preference (global within AS)**
- **Prefer locally originated route**
- **Shortest AS path**

# BGP Path Selection Algorithm (continued)

- **Lowest origin code**

**IGP < EGP < incomplete**

- **Lowest Multi-Exit Discriminator (MED)**

**If `bgp deterministic-med`, order the paths before comparing**

**If `bgp always-compare-med`, then compare for all paths**

**otherwise MED only considered if paths are from the same AS (default)**

# BGP Path Selection Algorithm (continued)

- **Prefer eBGP path over iBGP path**
- **Path with lowest IGP metric to next-hop**
- **For eBGP paths:**
  - If multipath is enabled, install N parallel paths in forwarding table**
  - If router-id is the same, go to next step**
  - If router-id is not the same, select the oldest path**

# BGP Path Selection Algorithm (continued)

- **Lowest router-id (originator-id for reflected routes)**
- **Shortest cluster-list**
  - Client **must** be aware of Route Reflector attributes!
- **Lowest neighbour address**

# Applying Policy with BGP

How to use the “tools”

# Applying Policy with BGP

- **Policy-based on AS path, community or the prefix**
- **Rejecting/accepting selected routes**
- **Set attributes to influence path selection**
- **Tools:**
  - Prefix-list (filters prefixes)**
  - Filter-list (filters ASes)**
  - Route-maps and communities**



# Policy Control – Prefix List

Cisco.com

- **Per neighbour prefix filter**  
**incremental configuration**
- **High performance access-list**
- **Inbound or Outbound**
- **Based upon network numbers (using familiar IPv4 address/mask format)**

# Prefix-list Command

```
[no] ip prefix-list <list-name> [seq <seq-value>] deny |  
    permit <network>/<len> [ge <ge-value>] [le <le-value>]
```

**<network>/<len>**: The prefix and its length

**ge <ge-value>**: "greater than or equal to"

**le <le-value>**: "less than or equal to"

**Both "ge" and "le" are optional. Used to specify the range of the prefix length to be matched for prefixes that are more specific than <network>/<len>**

# Prefix Lists – Examples

- **Deny default route**

```
ip prefix-list EG deny 0.0.0.0/0
```

- **Permit the prefix 35.0.0.0/8**

```
ip prefix-list EG permit 35.0.0.0/8
```

- **Deny the prefix 172.16.0.0/12**

```
ip prefix-list EG deny 172.16.0.0/12
```

- **In 192/8 allow up to /24**

```
ip prefix-list EG permit 192.0.0.0/8 le 24
```

**This allows all prefix sizes in the 192.0.0.0/8 address block, apart from /25, /26, /27, /28, /29, /30, /31 and /32.**

# Prefix Lists – Examples

- **In 192/8 deny /25 and above**

```
ip prefix-list EG deny 192.0.0.0/8 ge 25
```

This denies all prefix sizes /25, /26, /27, /28, /29, /30, /31 and /32 in the address block 192.0.0.0/8.

It has the same effect as the previous example

- **In 193/8 permit prefixes between /12 and /20**

```
ip prefix-list EG permit 193.0.0.0/8 ge 12 le 20
```

This denies all prefix sizes /8, /9, /10, /11, /21, /22, ... and higher in the address block 193.0.0.0/8.

- **Permit all prefixes**

```
ip prefix-list EG permit 0.0.0.0/0 le 32
```

0.0.0.0 matches all possible addresses, “0 le 32” matches all possible prefix lengths

# Policy Control – Prefix List

- **Example Configuration**

```
router bgp 200
  network 215.7.0.0
  neighbor 220.200.1.1 remote-as 210
  neighbor 220.200.1.1 prefix-list PEER-IN in
  neighbor 220.200.1.1 prefix-list PEER-OUT out
!
ip prefix-list PEER-IN deny 218.10.0.0/16
ip prefix-list PEER-IN permit 0.0.0.0/0 le 32
ip prefix-list PEER-OUT permit 215.7.0.0/16
ip prefix-list PEER-OUT deny 0.0.0.0/0 le 32
```

# Policy Control – Filter List

- Filter routes based on AS path
- Inbound or Outbound
- Example Configuration:

```
router bgp 100
  network 215.7.0.0
  neighbor 220.200.1.1 filter-list 5 out
  neighbor 220.200.1.1 filter-list 6 in
!
ip as-path access-list 5 permit ^200$
ip as-path access-list 6 permit ^150$
```

# Policy Control – Regular Expressions

Cisco.com

- **Like Unix regular expressions**
  - .** Match one character
  - \*** Match any number of preceding expression
  - +** Match at least one of preceding expression
  - ^** Beginning of line
  - \$** End of line
  - \_** Beginning, end, white-space, brace
  - |** Or
  - ()** brackets to contain expression

# Policy Control – Regular Expressions

Cisco.com

- **Simple Examples**

<b>.*</b>	<b>match anything</b>
<b>.+</b>	<b>match at least one character</b>
<b>^\$</b>	<b>match routes local to this AS</b>
<b>_1800\$</b>	<b>originated by AS1800</b>
<b>^1800_</b>	<b>received from AS1800</b>
<b>_1800_</b>	<b>via AS1800</b>
<b>_790_1800_</b>	<b>via AS1800 and AS790</b>
<b>_(1800_)+</b>	<b>multiple AS1800 in sequence (used to match AS-PATH prepends)</b>
<b>_\\(65530\\)_</b>	<b>via AS65530 (confederations)</b>



# Policy Control – Regular Expressions

Cisco.com

- **Not so simple Examples**

**^[0-9]+\$**

**Match AS\_PATH length of one**

**^[0-9]+\_[0-9]+\$**

**Match AS\_PATH length of two**

**^[0-9]\*\_[0-9]+\$**

**Match AS\_PATH length of one or two**

**^[0-9]\*\_[0-9]\*\$**

**Match AS\_PATH length of one or two  
(will also match zero)**

**^[0-9]+\_[0-9]+\_[0-9]+\$**

**Match AS\_PATH length of three**

**\_(701|1800)\_**

**Match anything which has gone  
through AS701 or AS1800**

**\_1849(.\_+\_ )12163\$**

**Match anything of origin AS12163  
and passed through AS1849**

# Policy Control – Route Maps

- A route-map is like a “programme” for IOS
- Has “line” numbers, like programmes
- Each line is a separate condition/action
- Concept is basically:
  - if *match* then do *expression* and *exit*
  - else
  - if *match* then do *expression* and *exit*
  - else *etc*

# Route Maps – Caveats

- **Lines can have multiple set statements but only one match statement**
- **Line with only a set statement**
  - all prefixes are matched and set**
  - any following lines are ignored**
- **Line with a match/set statement and no following lines**
  - only prefixes matching go through**
  - the rest are dropped**

# Route Maps – Caveats

- Example

omitting the third line below means that prefixes not matching **list-one** or **list-two** are dropped

```
route-map sample permit 10
  match ip address prefix-list list-one
  set local-preference 120
!
route-map sample permit 20
  match ip address prefix-list list-two
  set local-preference 80
!
route-map sample permit 30 ! Don't forget this
```

# Policy Control – Route Maps

- **Example Configuration – route map and prefix-lists**

```
router bgp 100
  neighbor 1.1.1.1 route-map infilter in
  !
route-map infilter permit 10
  match ip address prefix-list HIGH-PREF
  set local-preference 120
  !
route-map infilter permit 20
  match ip address prefix-list LOW-PREF
  set local-preference 80
  !
ip prefix-list HIGH-PREF permit 10.0.0.0/8
ip prefix-list LOW-PREF permit 20.0.0.0/8
```

# Policy Control – Route Maps

- **Example Configuration – route map and filter lists**

```
router bgp 100
  neighbor 220.200.1.2 remote-as 200
  neighbor 220.200.1.2 route-map filter-on-as-path in
!
route-map filter-on-as-path permit 10
  match as-path 1
  set local-preference 80
!
route-map filter-on-as-path permit 20
  match as-path 2
  set local-preference 200
!
ip as-path access-list 1 permit _150$
ip as-path access-list 2 permit _210_
```

# Policy Control – Route Maps

- **Example configuration of AS-PATH prepend**

```
router bgp 300
  network 215.7.0.0
  neighbor 2.2.2.2 remote-as 100
  neighbor 2.2.2.2 route-map SETPATH out
!
route-map SETPATH permit 10
  set as-path prepend 300 300
```
- **Use your **own** AS number when prepending**  
**Otherwise BGP loop detection may cause disconnects**

# Policy Control – Route Maps

Cisco.com

- **Route Map MATCH Articles**

**as-path**

**clns address**

**clns next-hop**

**clns route-source**

**community**

**interface**

**ip address**

**ip next-hop**

**ip route-source**

**length**

**metric**

**nlri**

**route-type**

**tag**



# Policy Control – Route Maps

Cisco.com

- **Route map SET Articles**

**as-path**

**automatic-tag**

**clns**

**comm-list**

**community**

**dampening**

**default interface**

**interface**

**ip default next-hop**

**ip next-hop**

# Policy Control – Route Maps

Cisco.com

- **Route map SET Articles**

**ip precedence**

**ip qos-group**

**ip tos**

**level**

**local preference**

**metric**

**metric-type**

**next-hop**

**nlri multicast**

**nlri unicast**

**origin**

**tag**

**traffic-index**

**weight**

# Policy Control – Matching Communities

- **Example Configuration**

```
router bgp 100
  neighbor 220.200.1.2 remote-as 200
  neighbor 220.200.1.2 route-map filter-on-community in
!
route-map filter-on-community permit 10
  match community 1
  set local-preference 50
!
route-map filter-on-community permit 20
  match community 2 exact-match
  set local-preference 200
!
ip community-list 1 permit 150:3 200:5
ip community-list 2 permit 88:6
```

# Policy Control – Setting Communities

- **Example Configuration**

```
router bgp 100
  network 215.7.0.0
  neighbor 220.200.1.1 remote-as 200
  neighbor 220.200.1.1 send-community
  neighbor 220.200.1.1 route-map set-community out
!
route-map set-community permit 10
  match ip address prefix-list NO-ANNOUNCE
  set community no-export
!
route-map set-community permit 20
  match ip address prefix-list EVERYTHING
!
ip prefix-list NO-ANNOUNCE permit 172.168.0.0/16 ge 17
ip prefix-list EVERYTHING permit 0.0.0.0/0 le 32
```

# Aggregation Policies

- **Suppress Map**

Used to suppress selected more-specific prefixes (e.g. defined through a route-map) in the absence of the **summary-only** keyword.

- **Unsuppress Map**

Used to unsuppress selected more-specific prefixes per BGP peering when the **summary-only** keyword is in use.

# Aggregation Policies – Suppress Map

- **Example**

```
router bgp 100
  network 220.10.10.0
  network 220.10.11.0
  network 220.10.12.0
  network 220.10.33.0
  network 220.10.34.0
  aggregate-address 220.10.0.0 255.255.0.0 suppress-map block-net
  neighbor 222.5.7.2 remote-as 200
!
route-map block-net permit 10
  match ip address prefix-list SUPPRESS
!
ip prefix-list SUPPRESS permit 220.10.8.0/21 le 32
ip prefix-list SUPPRESS deny 0.0.0.0/0 le 32
!
```

# Aggregation Policies – Suppress Map

- **show ip bgp** on the local router

```
router1#sh ip bgp
BGP table version is 11, local router ID is 222.5.7.1
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal
Origin codes: i - IGP, e - EGP, ? - incomplete
Network          Next Hop          Metric LocPrf Weight Path
*> 220.10.0.0/16  0.0.0.0          32768 i
s> 220.10.10.0    0.0.0.0          0          32768 i
s> 220.10.11.0    0.0.0.0          0          32768 i
s> 220.10.12.0    0.0.0.0          0          32768 i
*> 220.10.33.0    0.0.0.0          0          32768 i
*> 220.10.34.0    0.0.0.0          0          32768 i
```

# Aggregation Policies – Suppress Map

- **show ip bgp** on the remote router

```
router2#sh ip bgp
```

```
BGP table version is 90, local router ID is 222.5.7.2
```

```
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal
```

```
Origin codes: i - IGP, e - EGP, ? - incomplete
```

Network	Next Hop	Metric	LocPrf	Weight	Path
*> 220.10.0.0/16	222.5.7.1			0 100	i
*> 220.10.33.0	222.5.7.1	0		0 100	i
*> 220.10.34.0	222.5.7.1	0		0 100	i



# Aggregation Policies – Unsuppress Map

- **Example**

```
router bgp 100
  network 220.10.10.0
  network 220.10.11.0
  network 220.10.12.0
  network 220.10.33.0
  network 220.10.34.0
  aggregate-address 220.10.0.0 255.255.0.0 summary-only
  neighbor 222.5.7.2 remote-as 200
  neighbor 222.5.7.2 unsuppress-map leak-net
!
route-map leak-net permit 10
  match ip address prefix-list LEAK
!
ip prefix-list LEAK permit 220.10.8.0/21 le 32
ip prefix-list LEAK deny 0.0.0.0/0 le 32
!
```

# Aggregation Policies – Unsuppress Map

- **show ip bgp** on the local router

```
router1#sh ip bgp
```

```
BGP table version is 11, local router ID is 222.5.7.1
```

```
Status codes: s suppressed, d damped, h history, * valid, > best, i -internal
```

```
Origin codes: i - IGP, e - EGP, ? - incomplete
```

Network	Next Hop	Metric	LocPrf	Weight	Path
*> 220.10.0.0/16	0.0.0.0			32768	i
s> 220.10.10.0	0.0.0.0	0		32768	i
s> 220.10.11.0	0.0.0.0	0		32768	i
s> 220.10.12.0	0.0.0.0	0		32768	i
s> 220.10.33.0	0.0.0.0	0		32768	i
s> 220.10.34.0	0.0.0.0	0		32768	i

# Aggregation Policies – Unsuppress Map

- **show ip bgp** on the remote router

```
router2#sh ip bgp
```

```
BGP table version is 90, local router ID is 222.5.7.2
```

```
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal
```

```
Origin codes: i - IGP, e - EGP, ? - incomplete
```

Network	Next Hop	Metric	LocPrf	Weight	Path
*> 220.10.0.0/16	222.5.7.1			0 100	i
*> 220.10.10.0	222.5.7.1	0		0 100	i
*> 220.10.11.0	222.5.7.1	0		0 100	i
*> 220.10.12.0	222.5.7.1	0		0 100	i

# Aggregation Policies – Aggregate Address

- **Summary-only used**

**all subprefixes  
suppressed**

**unsuppress-map to  
selectively leak  
subprefixes**

**bgp per neighbour  
configuration**

- **Absence of summary-  
only**

**no subprefixes  
suppressed**

**suppress-map to  
selectively suppress  
subprefixes**

**bgp global configuration**

# **BGP Attributes and Policy Control**

**ISP/IXP Workshops**